


PressurePro's PULSE, the first display introduced in the TPMS+/Version 2 line, gives users an in-cab viewing option that packs our complete list of advanced features in an easy to use, attractive package. Utilized in both stand-alone and integrated set-ups, and spanning markets from recreational to OTR, PULSE showcases an easy to read OLED screen, fully customizable alerts, user configurable vehicle layout and viewing options and a quick glance alarm notification. An overhauled user interface walks users through installation/use while small scale drop-and-hook capability allows users to store and toggle between up to five pre-programmed units at ease. More, built in data logging, with the market's only microSD data dump, facilitates advanced analysis, while RS232 and J1939 capacity allow integration to vehicle networks and communications devices enabling remote monitoring and more.

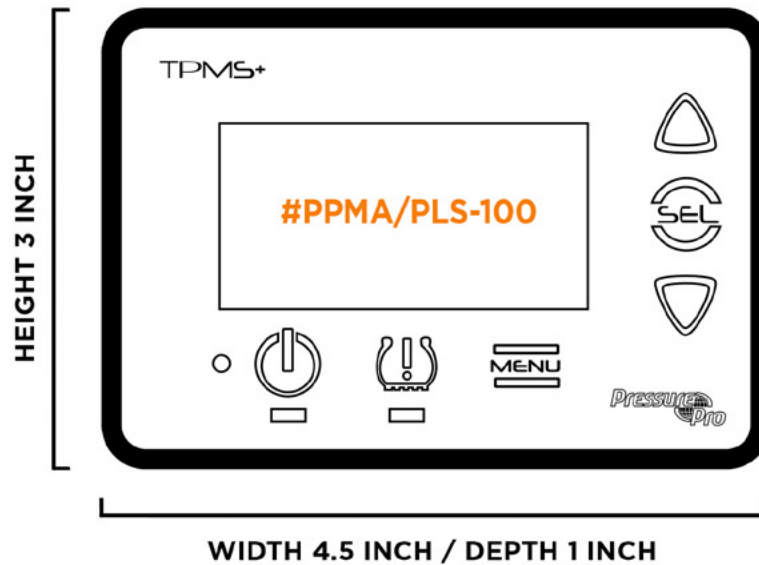

PULSE WEIGHT | 107.73 grams/ 3.8 ounces

CONFORMITY | FCC, IC, CE, RoHS

ENVIRONMENTAL TESTING | Select J1455 Shock, Vibe and Temperature Tests

TEMPERATURE RANGE | -40° to 70°C operating / 85°C storage

POWER | 12-36 volts, surge protection to 60V (max draw = 150 mA at 12V)

DISPLAY | 2.7" monochrome OLED display

COMMUNICATION | CAN/J1939, J1587 and RS232 protocols

DATA LOGGING | Local data logging with microSD export

RECEPTION RANGE* | 100' average with max of 1000' line of sight

PREFERRED ANTENNA | PULSE Coax Kit

TIRE CAPABILITY | Up to 16 tires per unit / 5 units capacity for 80 tires total
Virtual Drop-and-Hook capability for up to 5 units

CUSTOMIZATION | Allows users to customize alert levels/reference pressures

MANUFACTURING | **Designed and Manufactured in the USA**

*PULSE reception range is dependent on the vehicle environment and receiver antenna location.